

Kugelführung Aluminium/ Guidage à billes aluminium

N410A

Büchse / douille N409

Werkstoff / matière:

Stahl / acier 100 Cr6

Härte / trempe:

60 - 64HRc

Härtung / trempage:

einsatzgehärtet / cémenté

Ausführung / exécution:

geläppt / rectifié

Käfig / cage

Werkstoff / matière:


Aluminium

Kugeln / billes:

Stahl / acier 100 Cr6

superfinish, Quality AAA

Anwendungsbeispiel / Exemple d'application

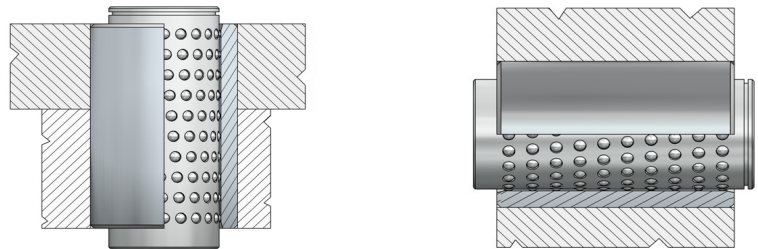

d1	15	16	19	20	24	25	30	32	38	40	48	50
d2	21	22	25	26	30	31	38	40	46	48	56	58
d3	28	28	32	32	40	40	48	48	58	58	70	70
N409	N411											
L1	L2											
23	30											
23	40											
23	45											
30	40											
30	45											
35	40											
35	45											
37	40											
37	45											
37	50											
40	45											
47	56											
47	63											
50	56											
50	63											
60	71											
60	80											
60	95											
70	80											
77	95											
80	90											
90	105											
95	120											
100	120											
120	140											